

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES


Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

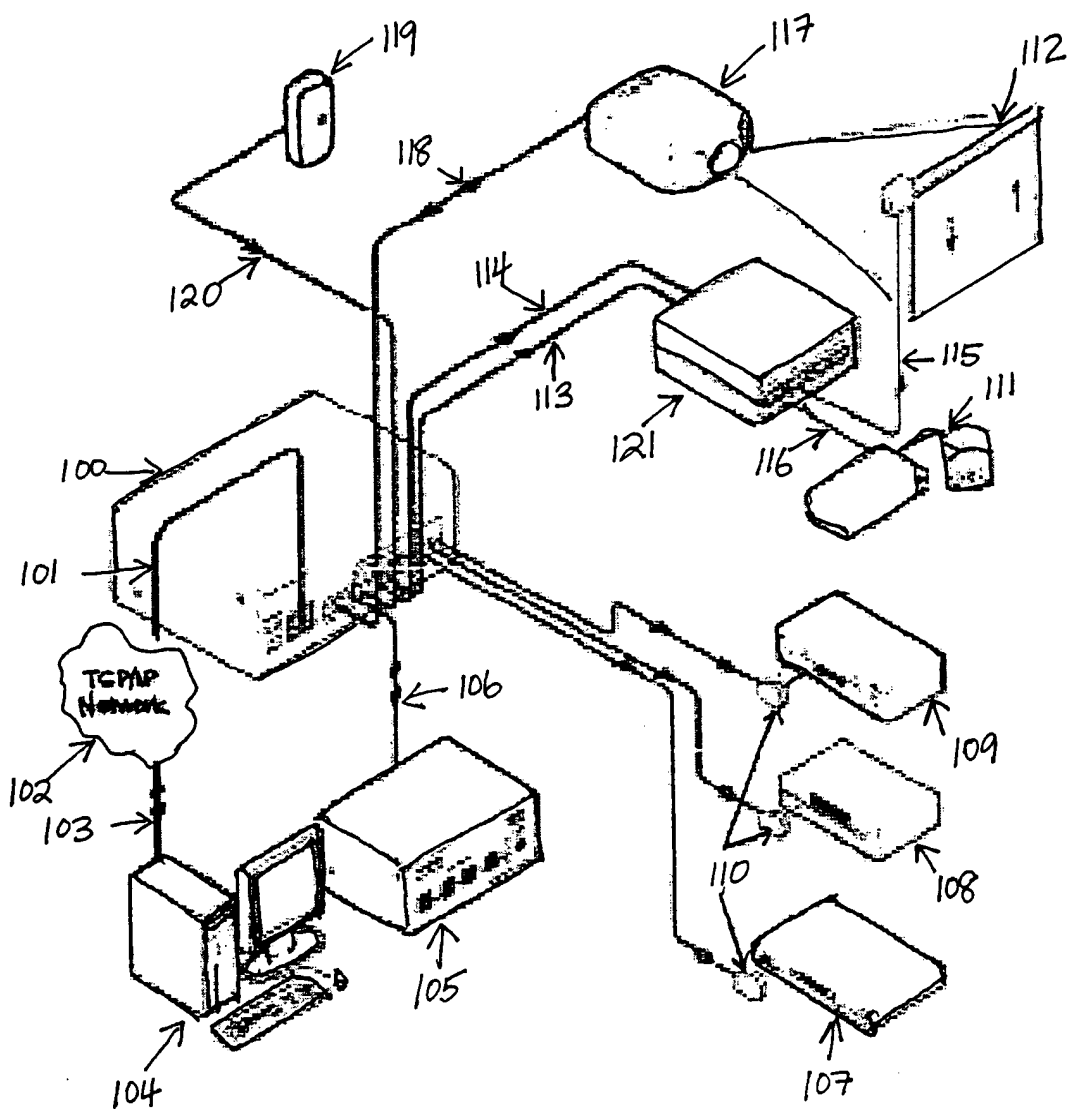

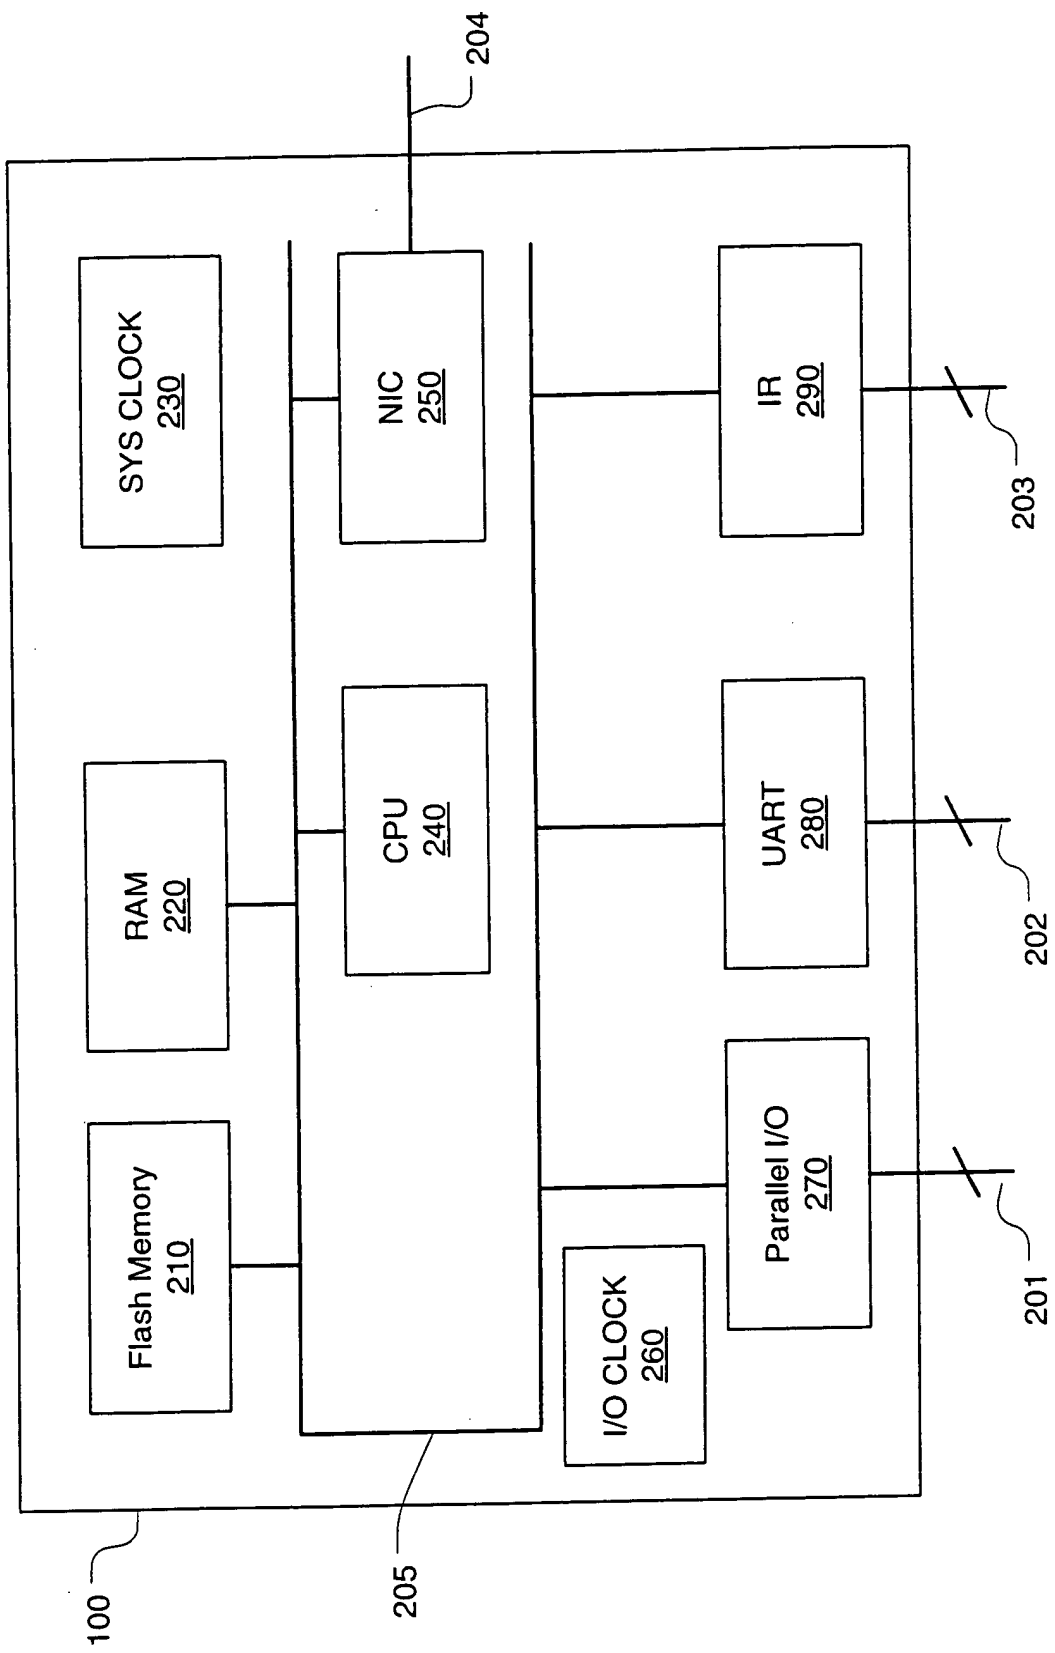


FIGURE 2

Serial Port Settings

Serial Port:
Port type:
Baud rate:
Data bits:
Parity:
Stop bits:
Flow control:

FIGURE 3

Flex / IO Port Settings

| Port | Mode | Pull-up | Threshold | Lower* (0-25.3V) | Upper* (0-25.3V) | Status |
|------|----------------|-------------------------------------|-------------------------------------|------------------|------------------|----------|
| 1 | Digital Input | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | 0.9 | 1.0 | High |
| 2 | Digital Output | <input checked="" type="checkbox"/> | <input type="checkbox"/> | | | Off (5V) |
| 3 | Digital Output | <input checked="" type="checkbox"/> | <input type="checkbox"/> | | | Off (5V) |
| 4 | Digital Output | <input checked="" type="checkbox"/> | <input type="checkbox"/> | | | Off (5V) |

Submit

Cancel

* Lower and Upper Threshold settings are for Digital Input only.

FIGURE 4

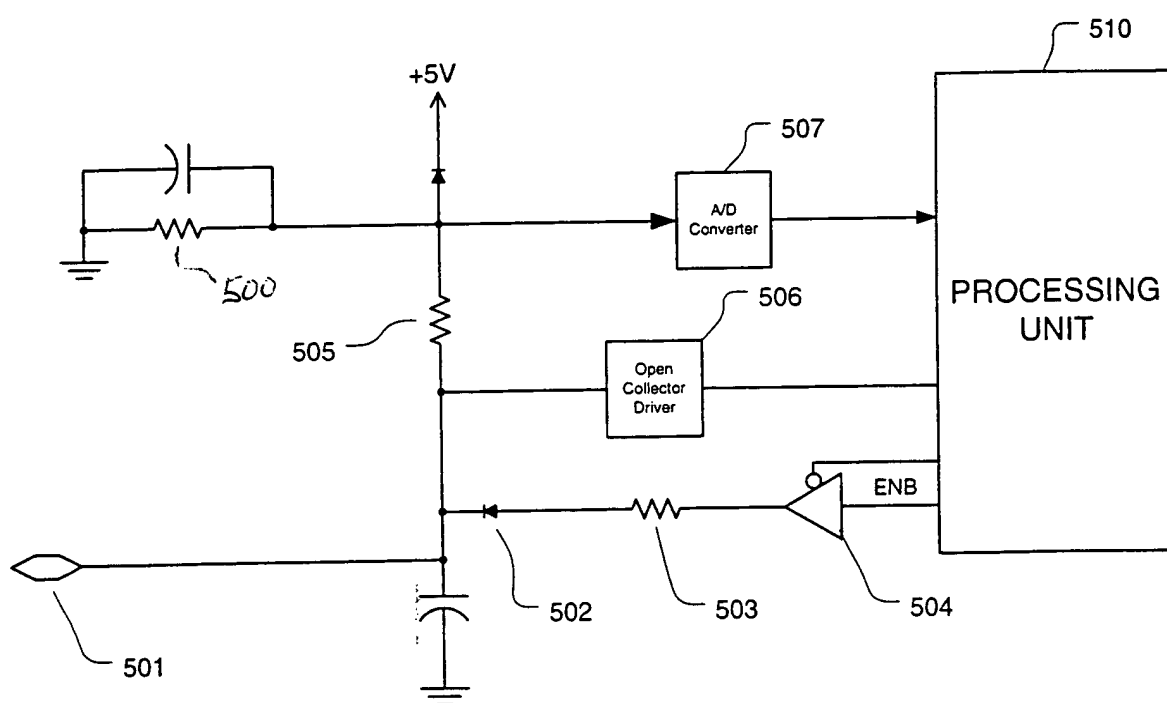


FIGURE 5

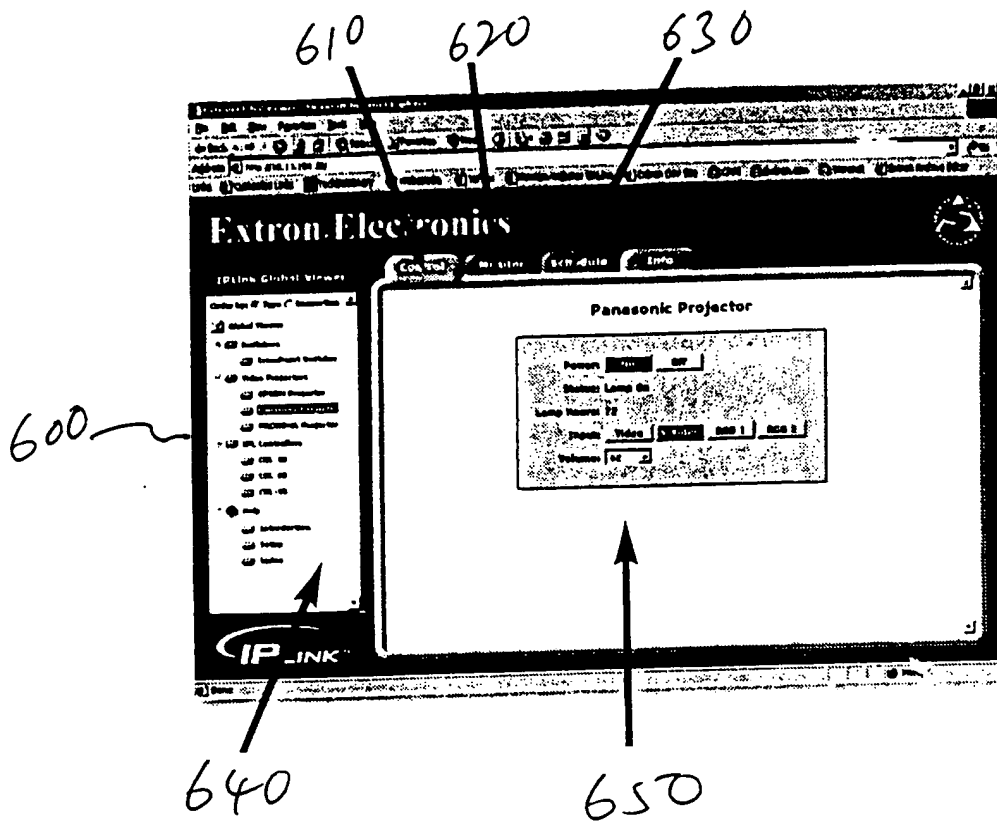


FIGURE 6

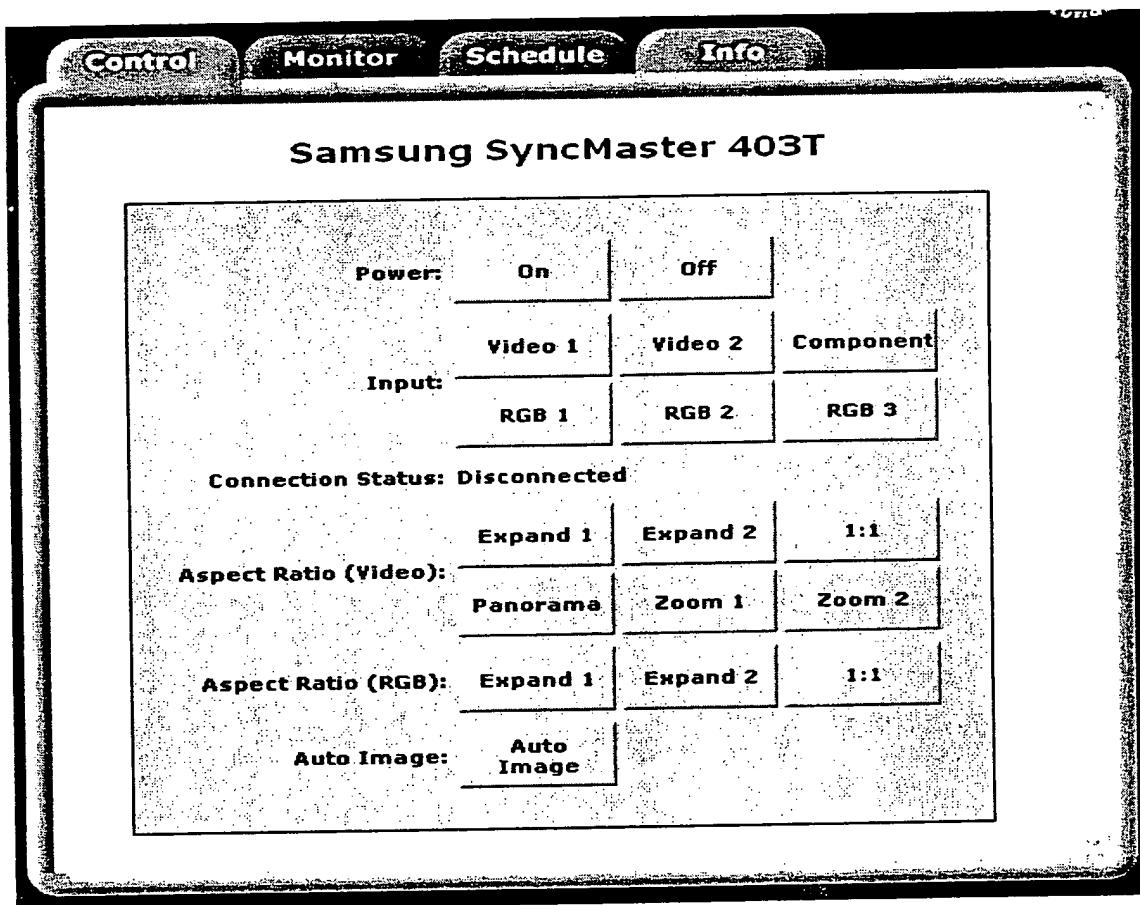


FIGURE 7

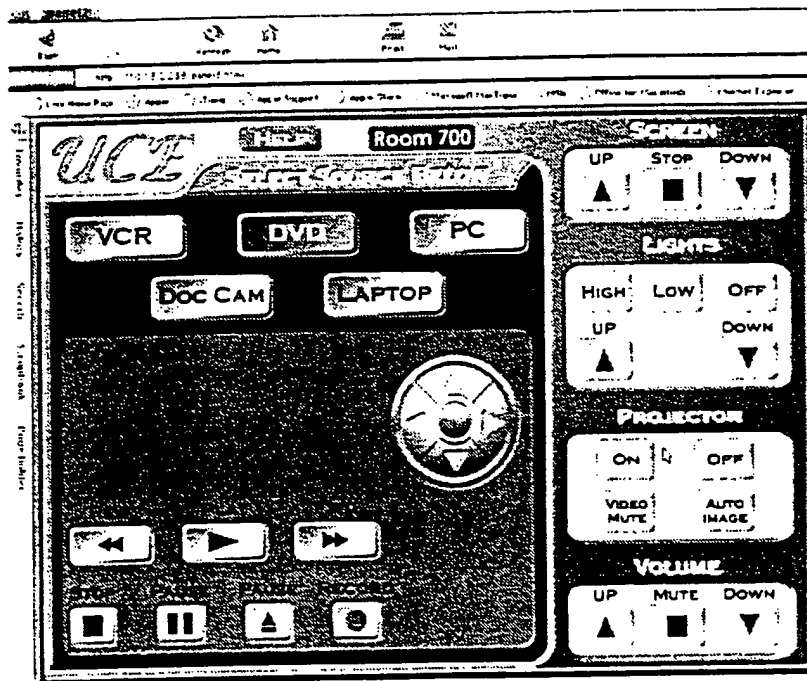


FIGURE 8

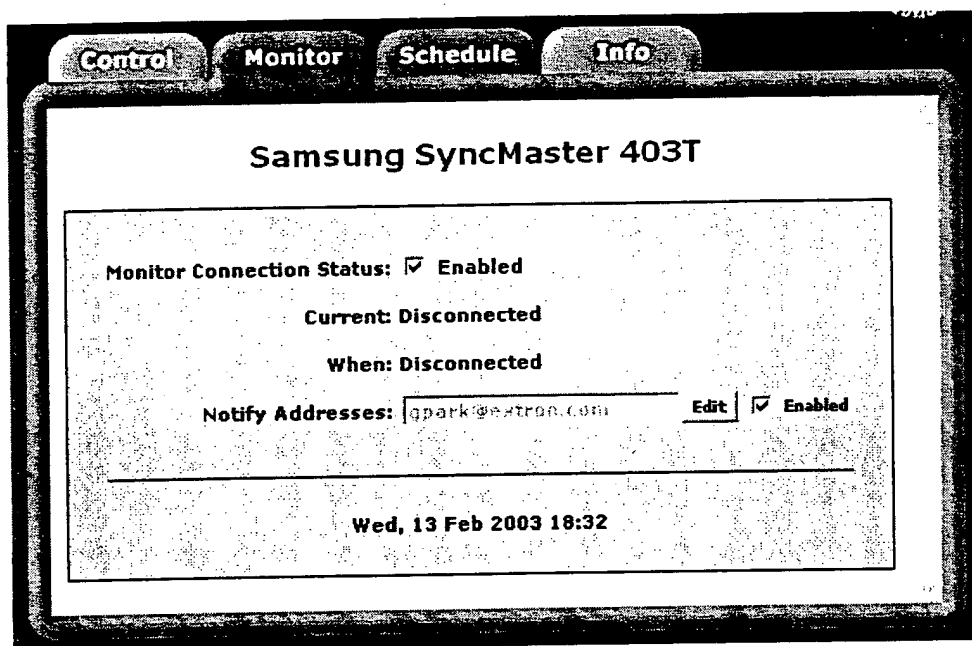


FIGURE 9

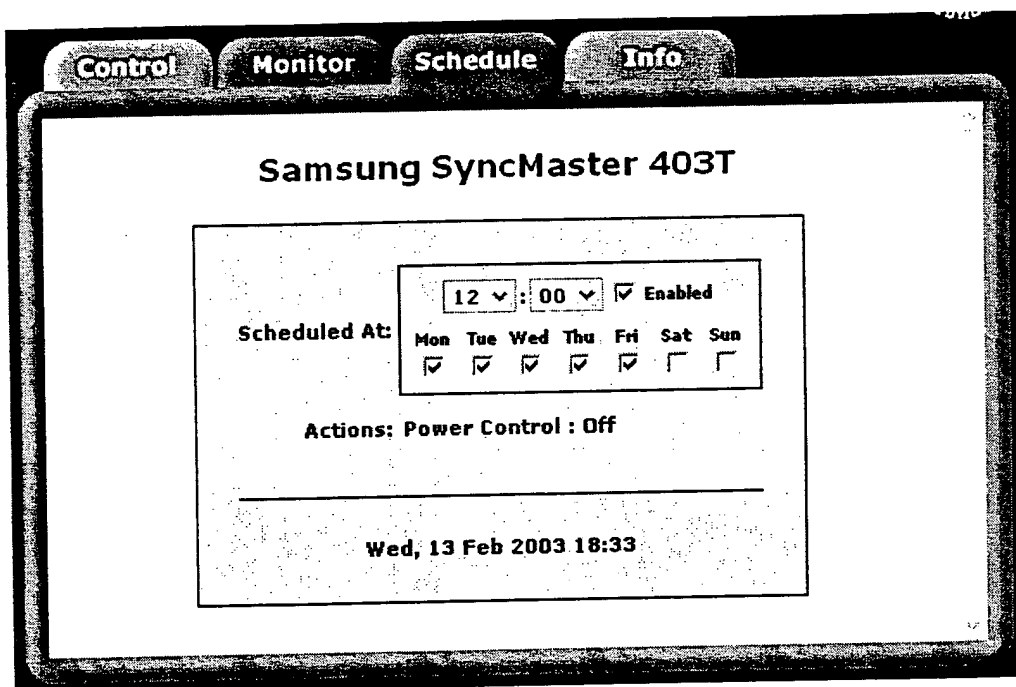


FIGURE 10

FIGURE 11A

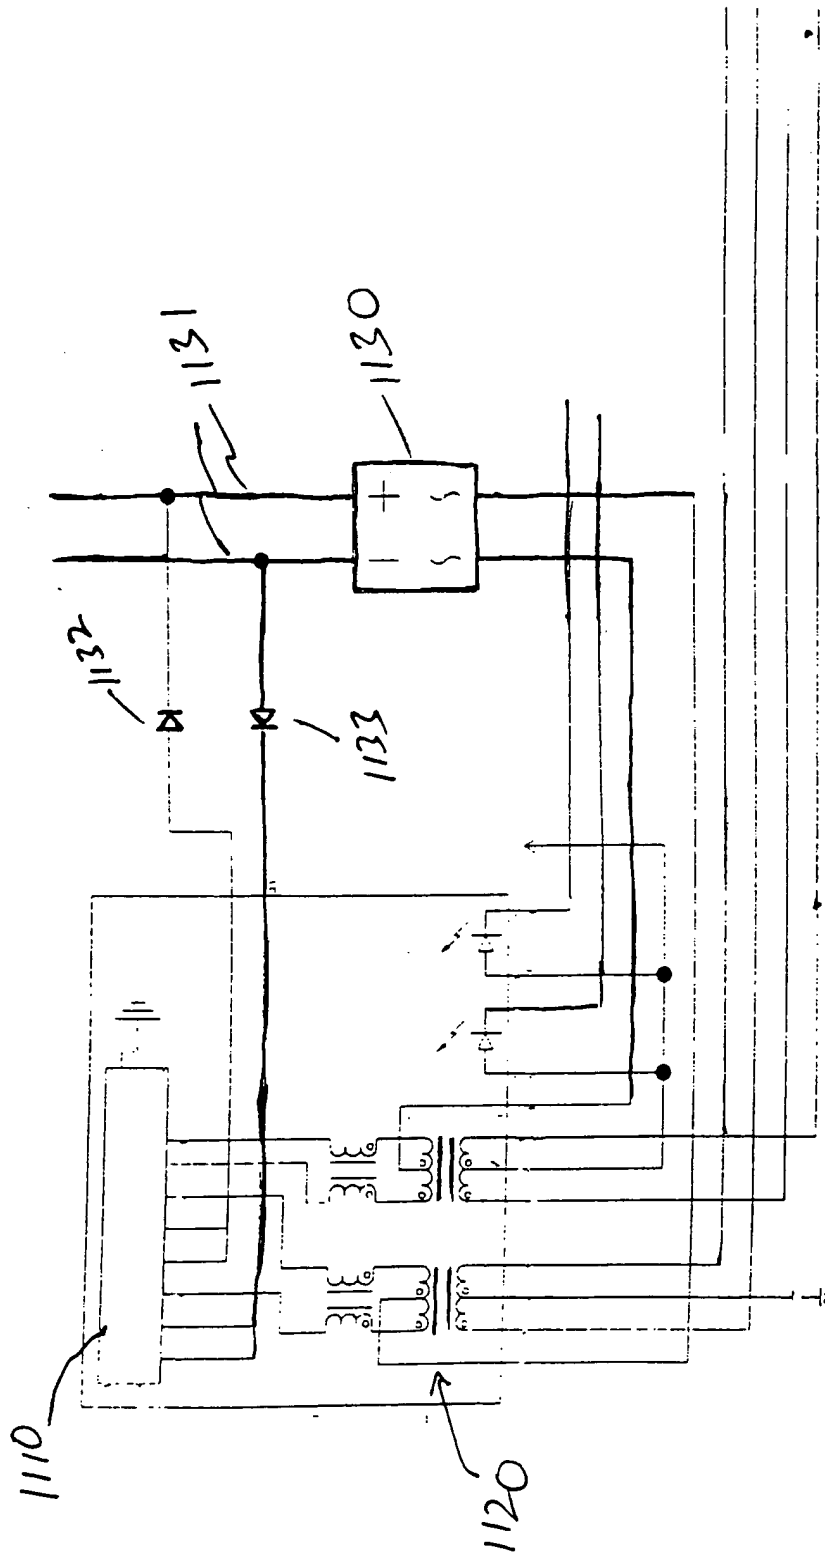


FIGURE 11B

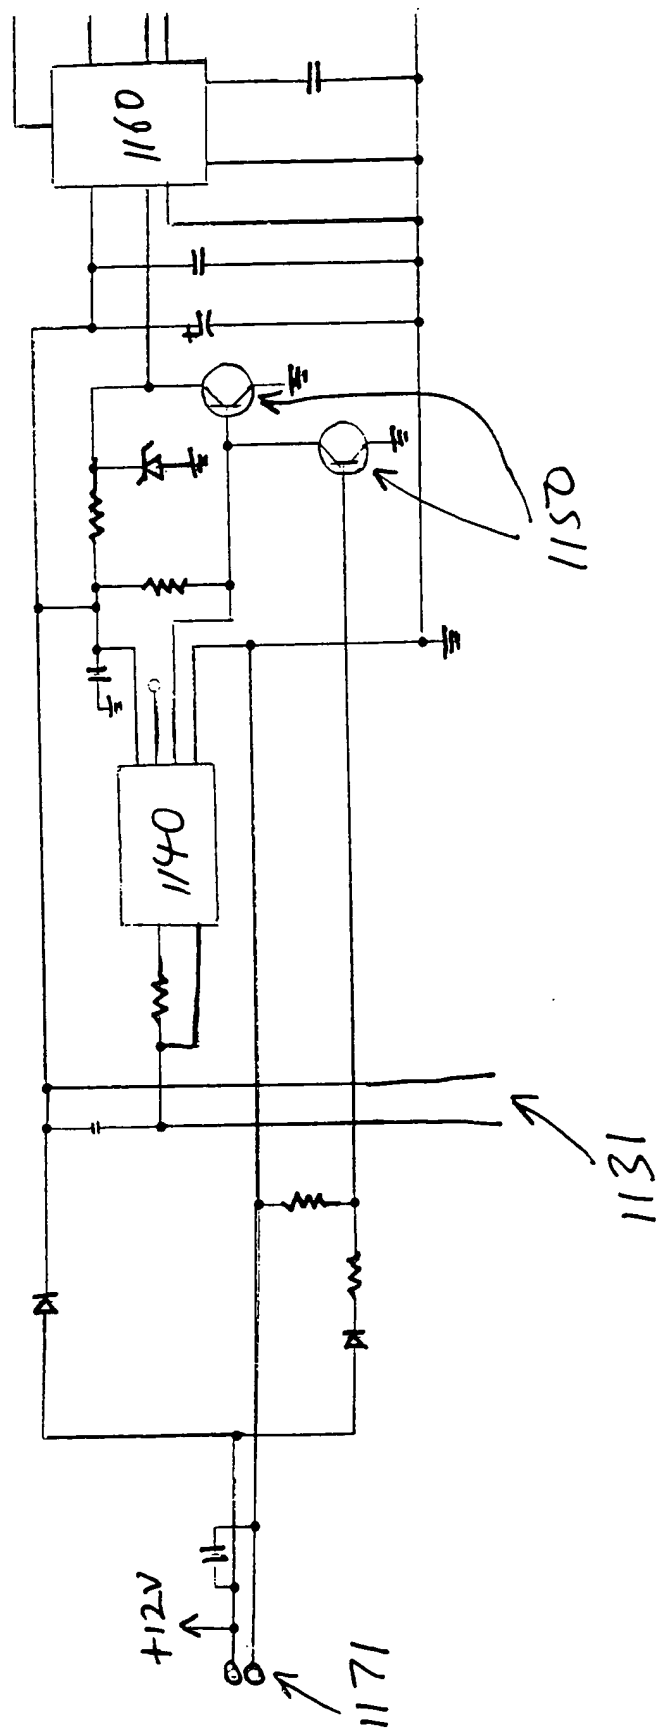
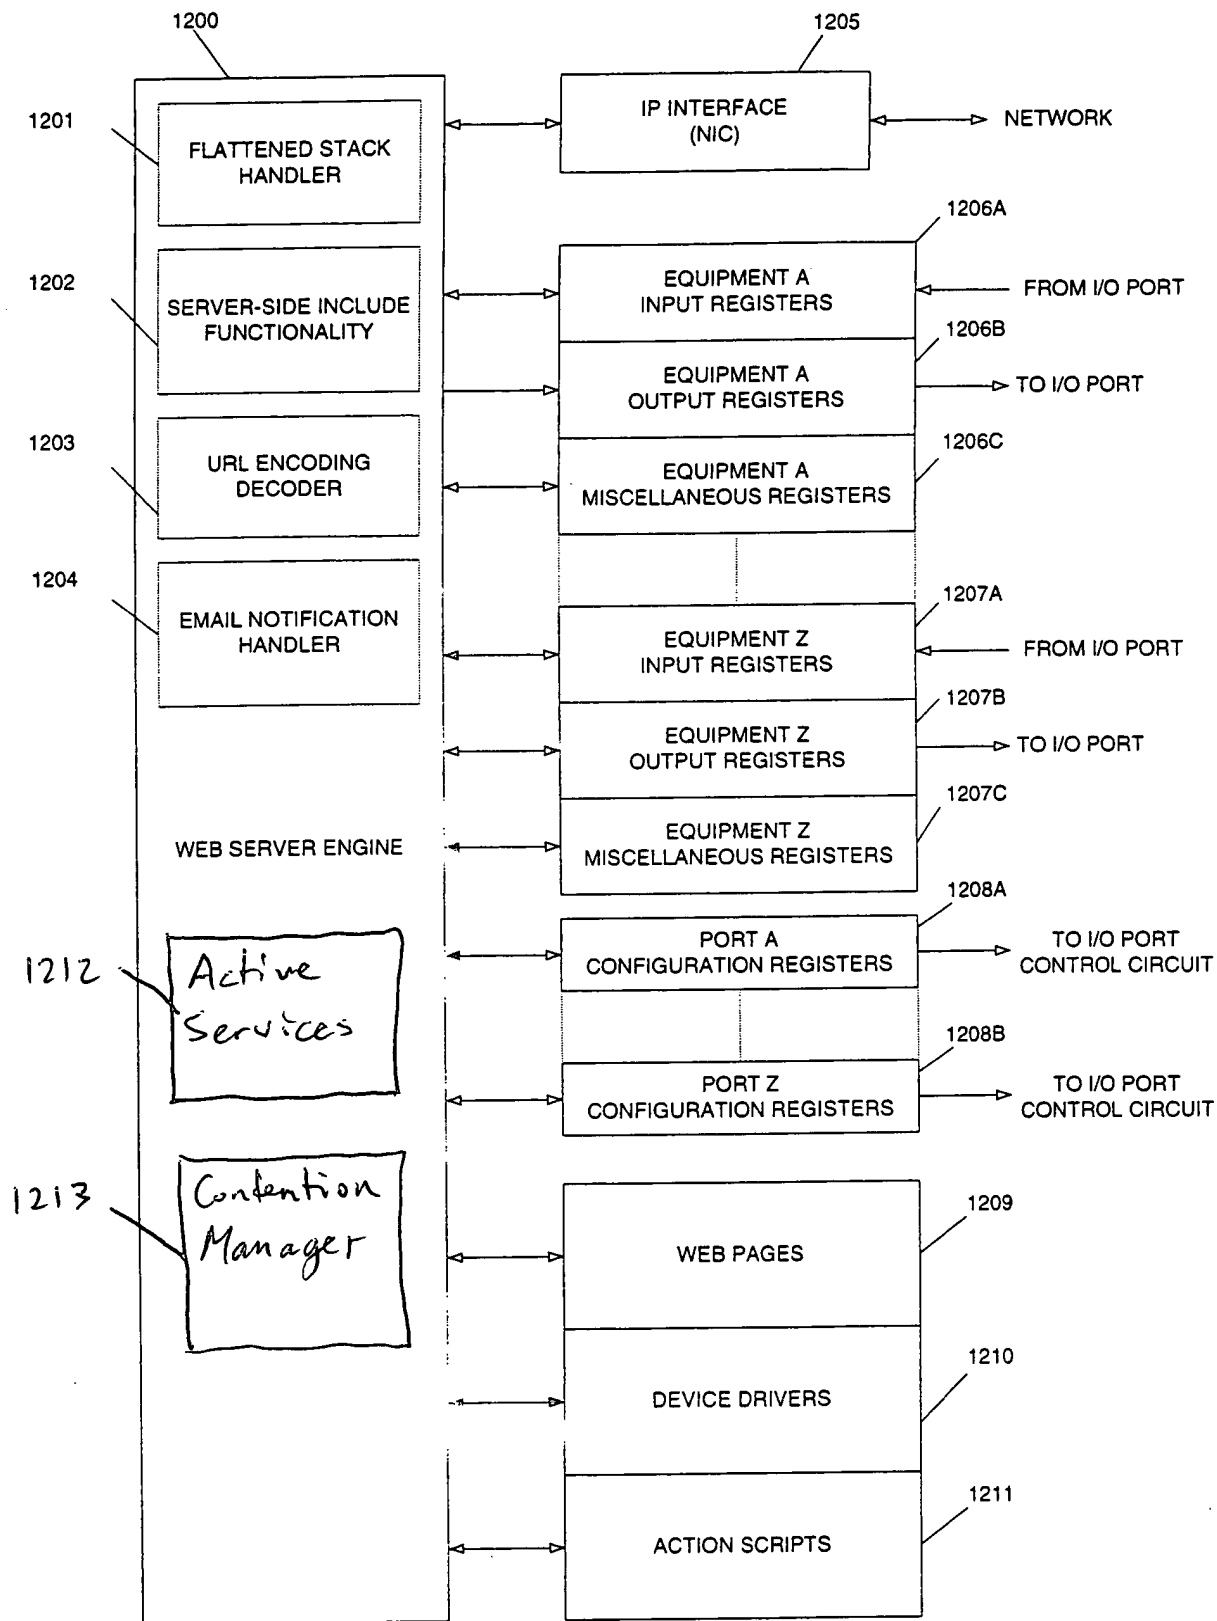


FIGURE 12



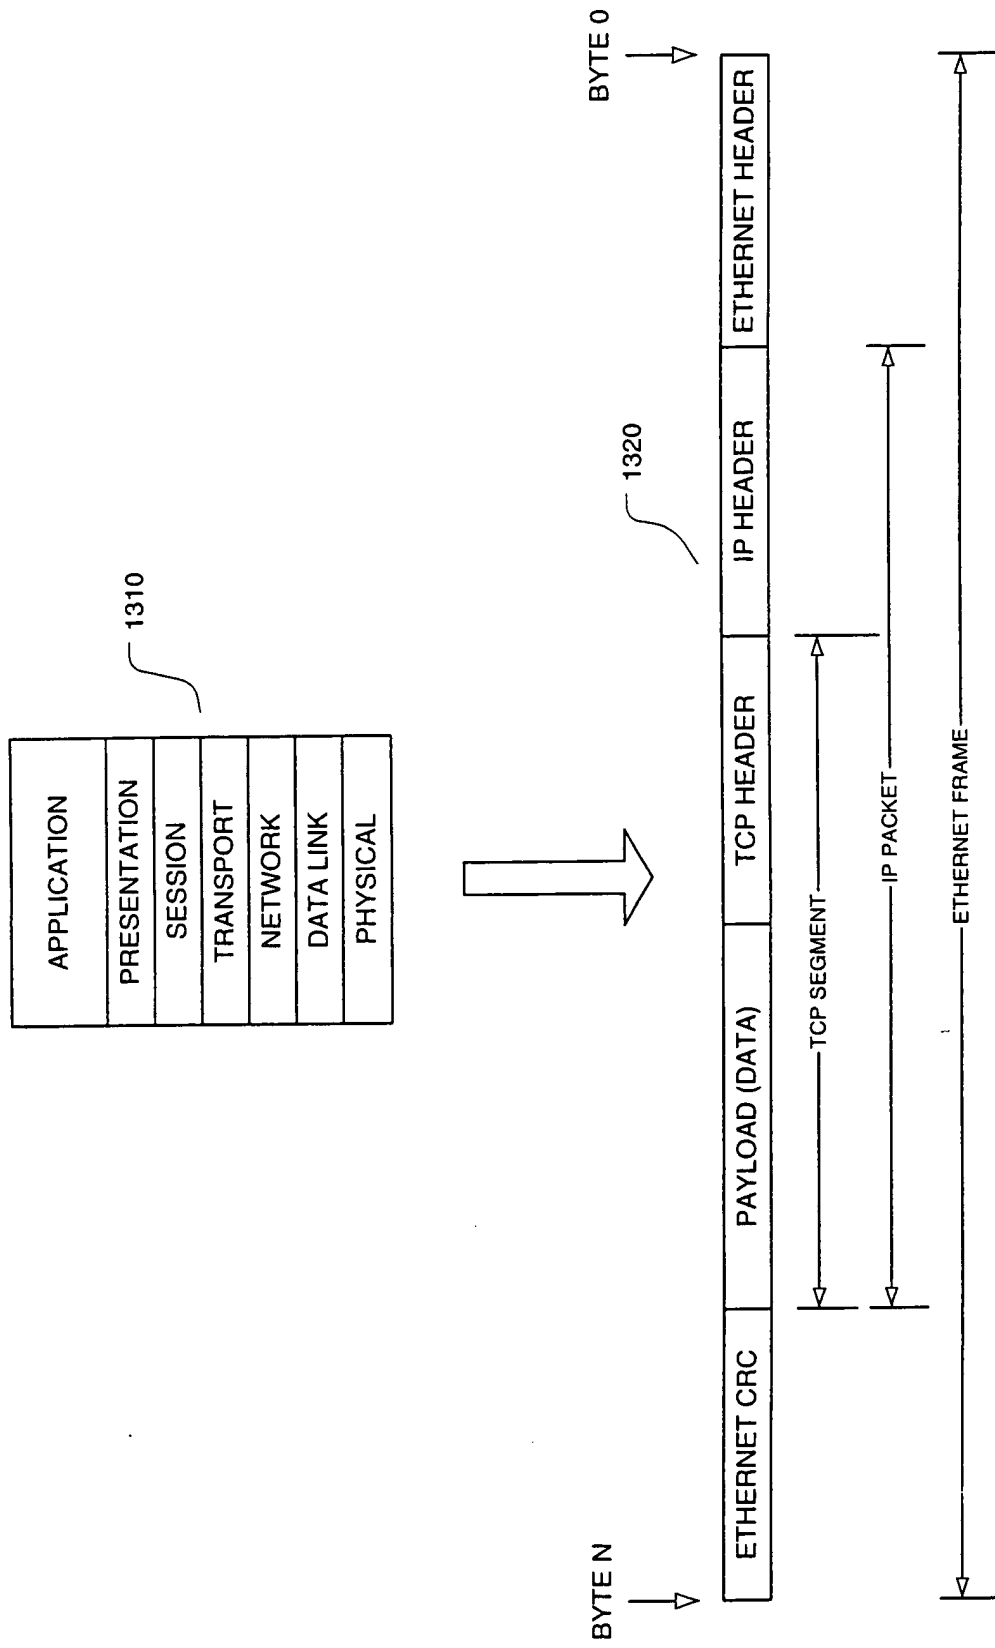


FIGURE 13

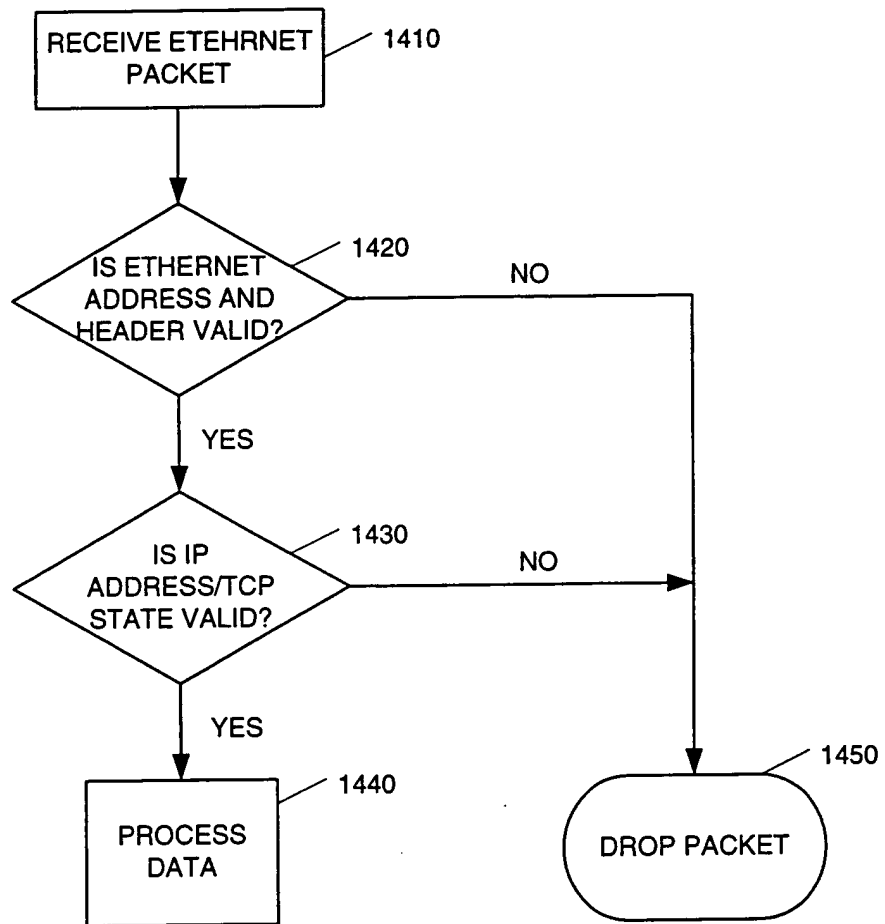


FIGURE 14

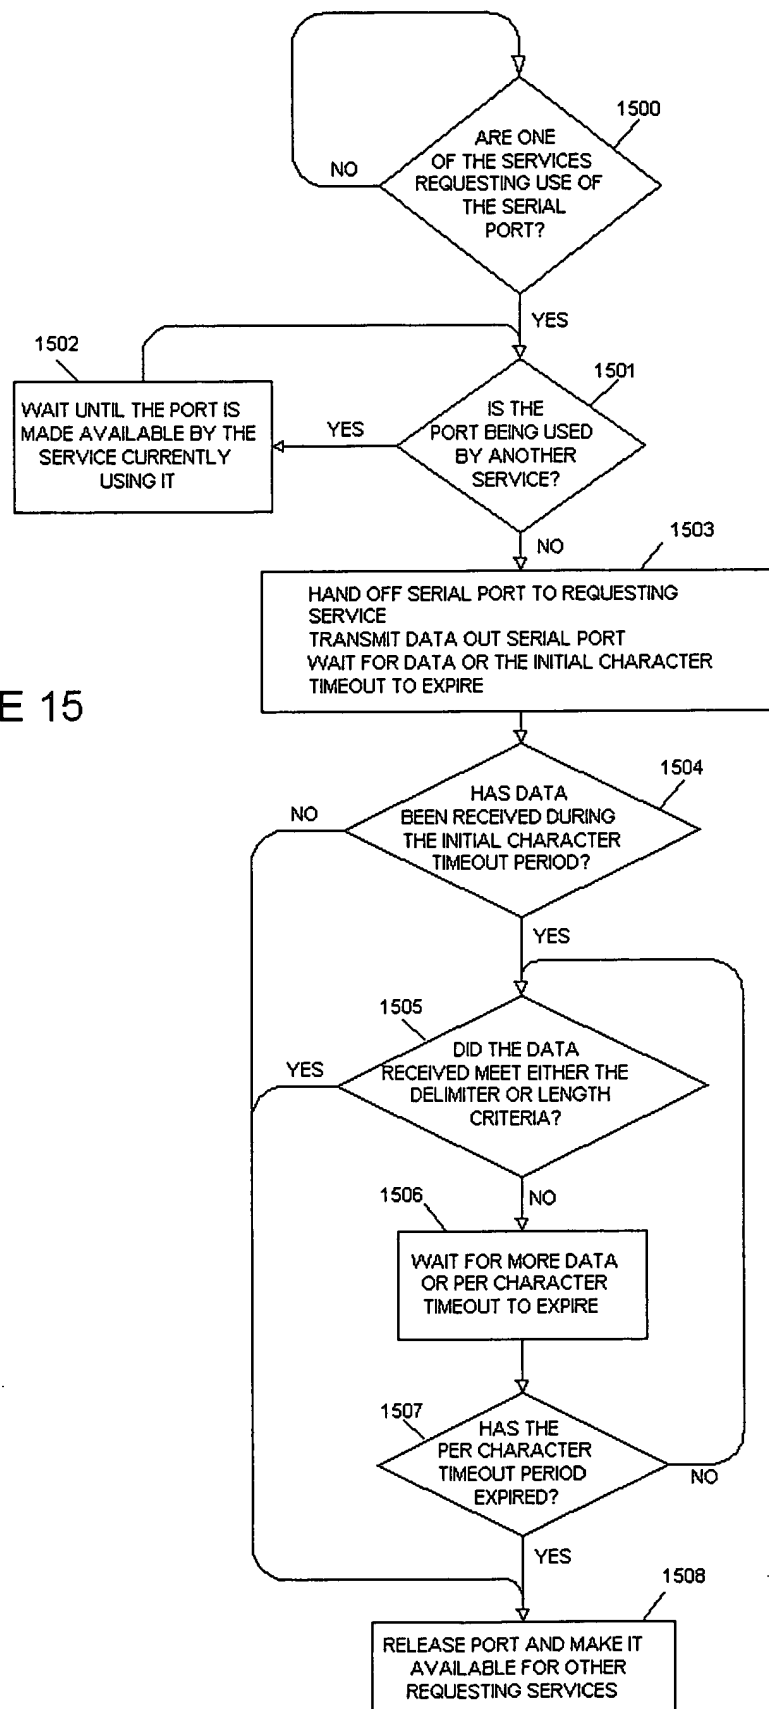


FIGURE 15

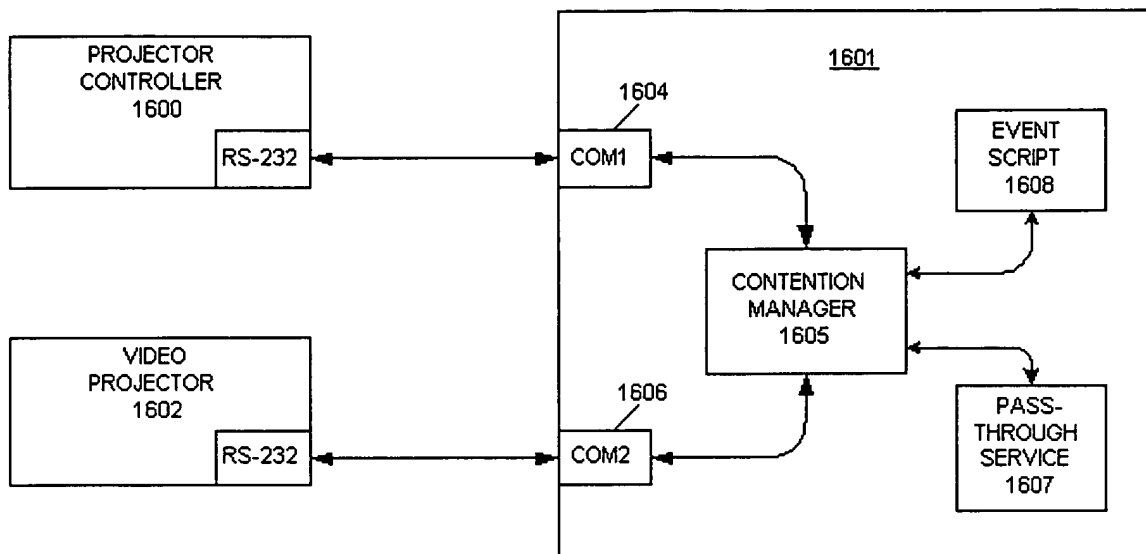


FIGURE 16